

EUROFUSION WPJET1-PR(16) 14729

A Huber et al.

Comparative H-mode density limit studies in JET and AUG

Preprint of Paper to be submitted for publication in 22nd International Conference on Plasma Surface Interactions in Controlled Fusion Devices (22nd PSI)



This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014-2018 under grant agreement No 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission. This document is intended for publication in the open literature. It is made available on the clear understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EUROfusion Programme Management Unit, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK or e-mail Publications.Officer@euro-fusion.org

Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EUROfusion Programme Management Unit, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK or e-mail Publications.Officer@euro-fusion.org

The contents of this preprint and all other EUROfusion Preprints, Reports and Conference Papers are available to view online free at http://www.euro-fusionscipub.org. This site has full search facilities and e-mail alert options. In the JET specific papers the diagrams contained within the PDFs on this site are hyperlinked

Comparative H-mode density limit studies in JET and AUG

<u>A. Huber</u>^a*, M. Bernert^b, S. Brezinsek^a, A. V. Chankin^b, G. Sergienko^a, V. Huber^c, S. Wiesen^a,
P. Abreu^d, M.N.A Beurskens^e, A. Boboc^e, M. Brix^e, G. Calabrò^f, D. Carralero^b, E. Delabie^g, T. Eich^b,
H.G.Esser^a, M. Groth^h, C. Guillemaut^d, S. Jachmichⁱ, A. Järvinen^h, E. Joffrin^j, A. Kallenbach^b,
U. Kruezi^e, P. Lang^b, Ch. Linsmeier^a, C. G. Lowry^e, C. F. Maggi^e, G.F. Matthews^e, A.G. Meigs^e,
Ph. Mertens^a, F. Reimold^a, J. Schweinzer^b, G. Sips^e, M. Stamp^e, E. Viezzer^b, M. Wischmeier^b,
H. Zohm^b, JET contributors^{**} and ASDEX Upgrade Team

EUROfusion Consortium, JET, Culham Science Centre, Abingdon, OX14 3DB, UK ^aForschungszentrum Jülich GmbH, Institut für Energie- und Klimaforschung – Plasmaphysik, Partner of the Trilateral Euregio Cluster (TEC), 52425 Jülich, Germany ^bMax-Planck-Institut für Plasmaphysik, D-85748 Garching, Germany ^cForschungszentrum Jülich GmbH, Supercomputing Centre, 52425 Jülich, Germany ^dInstituto de Plasmas e Fusão Nuclear, Instituto Superior Técnico, Universidade Lisboa, PT ^eCCFE, Culham Science Centre, Abingdon, OX14 3DB, UK ^fENEA for EUROfusion, via E. Fermi 45, 00044 Frascati (Rome), Italy ^gOak Ridge National Laboratory, Oak Ridge, Tennessee, USA ^hAalto University, Otakaari 4, 02015 Espoo, Finland ⁱLaboratory for Plasma Physics, ERM/KMS, B-1000 Brussels, Belgium ^jCEA, IRFM, F-13108 St Paul lez Durance, France

Abstract

Identification of the mechanisms for the H-mode density limit in machines with fully metallic walls, and their scaling to future devices is essential to find for these machines the optimal operational boundaries with the highest attainable density and confinement. Systematic investigations of H-mode density limit plasmas in experiments with deuterium external gas fuelling have been performed on machines with fully metallic walls, JET and AUG and results have been compared with one another.

Basically, the operation phases are identical for both tokamaks: the stable H-mode phase, degrading H-mode phase, breakdown of the H-mode with energy confinement deterioration usually accompanied by a dithering cycling phase, followed by the L-mode phase. The observed H-mode density limit on both machines is found close to the Greenwald limit $(n/n_{GW}=0.8-1.1)$ in the observed magnetic configurations). The similar behaviour of the radiation

^{**} See Appendix of F. Romanelli et al., 25th IAEA Fusion Energy Conference, 2014, Russia

on both tokamaks demonstrates that the density limit (DL) is neither related to additional energy losses from the confined region by radiation, nor to an inward collapse of the hot discharge core induced by overcooling of the plasma periphery by radiation.

It was observed on both machines that detachment, as well as the X-point MARFE itself, does not trigger a transition in the confinement regime and thus does not present a limit on the plasma density. It is the plasma confinement, most likely determined by edge parameters, which is ultimately responsible for the transition from H- to L-mode.

The measured Greenwald fractions are found to be consistent with the predictions from different theoretical models [16,30] based on MHD instability theory in the near-SOL.

PACS: 52.25.Fi, 52.25.Vy, 52.40.Hf, 52.55.Fa, 52.55.Rk

PSI-22 keywords: density limit, H-mode, detachment, Greenwald fraction, JET, ASDEX

Upgrade

*Corresponding author address: Institut für Energie- und Klimaforschung – Plasmaphysik,

Forschungszentrum Jülich GmbH, Partner of the Trilateral Euregio Cluster (TEC), 52425

Jülich, Germany

*Corresponding author E-mail: <u>a.huber@fz-juelich.de</u>

Presenting author: Alexander Huber

Presenting author e-mail: A.Huber@fz-juelich.de

1. Introduction

Tokamak operation at high density with a partially or fully detached divertor is considered as the baseline scenario for ITER [1], DEMO [2] and future fusion power plants. The establishment of a detached divertor at densities close to the Greenwald limit n_{GW} [3,4] is mandatory for maximising the fusion power and for successful operation of future reactors to reduce the heat loads on plasma-facing components, in particular on the divertor target plates, to an acceptable level and to reduce the tungsten sputtering. The empirically found operational limit for tokamaks is defined by $n_{GW} = \frac{I_p}{\pi a^2}$, where n_{GW} is the line-averaged density in units of 10^{20} m⁻³, I_p the plasma current in MA and *a* the minor radius in m.

In tokamak machines, the high confinement H-mode performance is limited at high density by a transition first to the type III ELM regime and then to the L-mode. The H-mode density limit, the maximum plasma density accessible before back transition from the H-mode to the low confinement mode (L-mode), typically takes place at Greenwald fractions ($f_{GW} = \frac{\overline{n_e}}{n_{GW}}$) of 0.8–1. This limit defines one of the most fundamental operational boundaries for fusion devices [3]. The H-mode density limit is not disruptive and therefore represents a soft limit, as the plasma operation can be continued at the lower confinement level. Also the transition into H-mode is possible under certain conditions.

In the present paper, we investigate the physics mechanisms that lead to the H-L back transition. Dedicated H-mode density limit experiments have been performed on JET and on ASDEX Upgrade (AUG). In both JET and AUG, the first wall and divertor walls were changed to metallic materials (tungsten and beryllium in JET and all tungsten in AUG), which has a significant impact on the radiation characteristics of the plasma.

In this contribution, the work is extended to investigate two models for the H-mode density limit based on the MHD ballooning drive mechanism requiring a greater variety of parameters in the scaling's Goldston and Chankin models. The f_{GW} scalings, and hence the applicability of the various H-mode density limit models, are tested against experimental databases of key plasma parameters established on JET and AUG.

2. Experiments

2.1. H-Mode density Limit Experiment in the JET Tokamak with ITER-like wall

H-mode density limit (DL) experiments with the ILW have been performed in single null plasma discharges (R=3.0m, a=0.92m, κ =1.68) in deuterium with plasma currents I_p=1.75-2.5MA and toroidal magnetic fields $B_T \approx 1.8-3.4T$, corresponding to safety factors q_{95} between 2.8 and 6.0 in low and high-triangularity magnetic equilibria. The additional NBI-power has been varied from 8 to 20MW. Fig.1 shows the time evolution of a typical H-mode density limit discharge in JET-ILW in low-triangularity magnetic equilibria (average triangularity of δ =0.22). Deuterium external gas fuelling into the inner leg of the divertor with a rate of up to of 2×10^{23} D/s was used in this 10MW NBI-heated discharge to raise the plasma density up to density limit. The BeII fast emission signal in the outer divertor represents the ELMs behaviour during the density ramp. When the density is raised by gas puffing, the confinement factor, which gives the energy confinement time with respect to the ITERH98P(y,2) scaling [5], remains at a constant level of $H_{98Y}=0.65$ up to about $n_e/n_{GW}=0.9$. Further gas puffing leads to a moderate increase of the density, but the confinement deteriorates strongly down to H_{98Y}=0.56 and the discharges usually make a back transition into the L mode. Prior to the final transition into the L-mode, type I ELMs are replaced by a sequence of H-L-H transitions, with short periods of H-mode embedded in the otherwise Lmode phase of the discharge, as shown in detail in Fig.4. The sequence of these transitions is what we will call 'dithering H-mode'. The dithering cycles can be seen as a modulation of the BeII signal in the divertor. Dithering cycles, have been firstly observed on ASDEX Upgrade during the gradual increase of the heating power Pheat close to the L-H power threshold (Pthr) [6] prior to final transition into the H-mode. The repetitive H-L-H transitions close to the H–L transition boundary have been observed in JT-60 [7] too, and in one H-mode DL pulse on ASDEX Upgrade.

2.2 General radiation behaviour during the density ramp

The energy losses due to radiation can cool down the confined plasma and thus cause the Hmode density limit. In previous studies at ASDEX Upgrade (AUG) and JET, both with a fully carbon covered wall, the density limit of H-mode has been attributed to the full detachment of the divertor [8,9] with the significant role of the radiation. However, in the JET-ILW as well in full-W ASDEX the poloidal radiation distribution as shown in Fig.2 for a JET H-mode DL pulse and the total radiated power as well as the radiation power in the main chamber (P_{rad}^{bulk}) stay almost constant during the H-mode phase until the H-L transition. Additionally, the radiation fraction, $\gamma_{rad} = \frac{P_{rad}}{P_{heat}}$, is low and is about 0.3 (0.4-0.6 for AUG). Therefore, the density limit is not related to additional energy losses from the confined region by radiation. It is also not related to inward collapse of the hot discharge core induced by overcooling of the plasma periphery by radiation. The effective ion charge, Z_{eff} is $\approx\!\!1.15$ in the density ramp pulses. Replacement of the first wall and divertor walls through metallic materials reduced significantly the carbon levels [10], resulting in a reduced radiation and reduced Z_{eff}. Under cold detached divertor conditions with significant reduction of W sputtering, the tungsten is introduced into the plasma only during the ELMs. Beryllium is a much weaker radiator than carbon. A significant fraction of the radiation is caused by deuterium [10]. A MARFE (at the X-point) does not appear before the H-L transition and, thus, is not related to the H-mode density limit.

2.3 H-Mode density Limit Experiment in the full tungsten ASDEX Upgrade tokamak

Dedicated experiments have been performed at the fully tungsten covered ASDEX Upgrade tokamak using the gas ramp discharges [11,12]. The standard scenario for these studies is a gas ramp discharge with a plasma current of $I_p = 0.8$ MA, a toroidal magnetic field on-axis of $B_T = 2.5 \text{ T}$, hence a safety factor q95 of about 6. The average triangularity is in the low to medium range of $\delta_{av} \approx 0.23$. The discharges are heated by neutral beam injection (NBI) with a standard input power of $P_{heat} = 7.5$ MW, which is well above the L-H power threshold of about 3.3 MW (at a separatrix surface of 43.6 m^2). The single-null equilibrium plasma configuration with strike points on the vertical targets has been applied in this study. The Hmode density limit discharges are only fuelled externally by valves in the private flux region of the lower divertor. A neutral pressure in the divertor of up to 8 Pa is necessary to achieve the plasma densities relevant for the H-mode DL. AUG has to be operated solely with the turbo pump system and without the cryo pump system, reducing the pumping capacity by a factor of ~5, in order to achieve these high pressures. Fig.3 shows several time traces of a typical H-mode DL gas ramp discharge. The ramp-up of plasma shape, current and heating power is finished at 1.5 s. From this point on, all external parameters are kept constant except the neutral gas pressure, which is increased by the constant gas puff. The plasma stored energy decreases constantly, indicating a reduction of the energy confinement time showing a similar tendency as on JET-ILW. The decrease of the plasma stored energy is reflected in the reduction of the H_{98Y}-factor. Similar to the case of JET-ILW, the total radiated power is constant or even slightly reducing during the discharge up to the disruption. Due to the high gas puff the tungsten concentration is in general below 5×10^{-5} (in most cases below 10^{-5}) for the H-mode DL discharges and has no significant effect on the plasma radiation. Similarly to JET-ILW, deuterium contributes to a considerable fraction of the radiation losses in the Hmode DL pulses.

3. Characterisation of the H-mode density limit

3.1 Characterisation of the H-mode DL on JET-ILW

The evolution of a gas fuelled, high density H mode discharge in JET-ILW can be described by three main stages as shown in Fig.1: a **Type I ELM phase**, then a **dithering cycling phase** with energy confinement deterioration, followed by the **L-mode phase**.

The radiation losses between ELMs tend to increase firstly during the Type I phase with following saturation at constant level of $\gamma = P_{rad}/P_{heat} = 0.3$ (averaged over ELMs $\langle \gamma \rangle = 0.37$) for larger densities beyond $n_e/n_{GW}=0.6$. After the 'dithering H-mode'a back transition from H to L-mode is observed at t=13.36s with $\gamma_{rad} \approx 0.4$. The H-mode density limit is typically defined as the maximum of n_e that is reached at the H-L boundary. The maximum density achieved in the JET-ILW gas fuelled steady state ELMy H-mode, shown in Fig.1, is ~92% of the Greenwald DL.

The impact of the phases on the plasma stored energy and the central line averaged electron density has been discussed intensively in [13]. Before the dithering phase, the stored energy and the confinement stay constant whereas the density is increasing in the core and in the edge. At the same time, the pedestal temperature (T_e^{ped}) decreases during the gas ramp so that the pedestal pressure stays constant. **This phase is called a stable H-mode,** since the pressure, and thus the confinement, stay constant while the density increases.

Two distinct sub-phases are identified in the 'dithering phase': an **early 'dithering phase'** with confinement degradation and a **late phase** with the breakdown of the H-mode.

During the earlier 'dithering phase', the density increases marginally and T_e^{ped} cools down, degrading the pedestal pressure and leading to a reduction of the confinement and of the stored energy.

Shortly before the H-L back transition during the late dithers a strong altering of the stored energy as well as a density drop by 15% have been observed, followed by the L-mode phase.

The duration of the dithering phase varies between the discharges in the database from 0.1s to over 0.5s. Systematically the dithering cycling has been observed in the configurations with both strike points on the vertical targets and only occasionally or with very short duration of the dithering phases in the configuration with the outer strike point positioned on the horizontal divertor plate. In later configuration an increase of the fuelling source is associated with a transition from type I to small ELMs combined with dithering cycles, which finally leads to the back transition.

3.2 Dithering cycles prior to the L-mode

Investigation of the 'dithering cycles' phenomenon is important for understanding the physics mechanisms that lead to H-mode density limit. Fig.4 shows the details of a 'dithering cycling' phase of typical JET H-mode pulses in a magnetic field configuration with both strike points on the vertical divertor targets. The cause of the repetitive H-L-H transitions must be the modulation of the plasma edge density, so that the sharp density rise during short H-mode periods, reflecting significant improvement in the particle confinement, triggers back H-L. During transient H-mode periods of the dithers, the inner divertor is completely detached and the outer divertor leg is at least partially detached. In spite of that, one observes that the plasma density both at the edge and in the core during the first sub-phase rises, reflecting a significant improvement in the particle confinement; it demonstrates that the detachment itself presents no limit on the plasma density and the H-L transition. The edge electron temperature, measured by the electron cyclotron emission (ECE) diagnostic [14], does not show any excursion during the dithering cycles and stays almost at the lowest value of \approx 140eV. Thus, a cold and dense pedestal during the H-mode phase increases significantly the collisionality of

the plasma pedestal. This is in line with the explanation given in [15,16] that the Greenwald DL could be explained from the requirements that, in the edge transport barrier, the radial pressure gradient does not exceed the ballooning stability threshold and the critical plasma collisionality. The duration of the transient L- and H-phases changes during the development of the dithers. The late dithers demonstrate longer L-phases (≈ 25 ms) than the early ones (≈ 10 ms) leading to the reduction of the n_e even before the H-L transition because the short H-mode periods are not able to provide a full recovery of the density. During the L-phases with the low edge density, the BeII-emission has large values whereas it decreases during the short H-mode phase together with the total radiation. The measurements with fast magnetic probe (dB/dt) show that the turbulence level is significantly increased (see Fig.4b) when the L-phase develops during the dithers. Similar to those after the final transition into the L-mode, the broadband fluctuations, reflecting the significant anomalous transport, have been observed in the low confinement dithering phase. Moreover, the n_e and T_e profiles, measured by the High Resolution Thomson Scattering system (HRTS) in transient L-mode periods demonstrate similarity to the profiles after transition into the L-mode (Fig.4c).

To clarify the question about possible formation of the MARFEs during the dithering phases dedicated analysis of these phases has been performed. Fig. 5 shows the time evolution of the space-resolved electron density evolved from the Stark broadening of the $D_{9\cdot2} \div D_{14\cdot2}$ transitions of the Balmer Lines. These measurements have been performed by divertor spectroscopy [17,18] which is recognised as an excellent tool for the investigation of the detachment as well as of the X-point MARFE. The solid line in the graph indicates the position of the X-point, the location of which was almost constant at R≈2.66m. Some increase in the n_e density has been observed after the H-L transition but during the dithering cycles phase before the transition the plasma performance demonstrates stable operation without MARFE.

Just before the H-L transition during the L-mode dithering cycling phase, strong radiation patterns of hydrogen emission lines (not shown in the graph) are located in the divertor region, inside the inner scrape-off layer (SOL), without any indication of a MARFE formation. Thus, during the dithering cycles the MARFE itself does not drive the H-L transition. The D_{γ}/D_{α} -ratio increases strongly up to level of ≈ 0.1 throughout the inner divertor plasma. This large ratio cannot be explained by radiation due to excitation processes where the ratio should be below 0.02 for TeSeV. It rather indicates the strong contribution of recombination processes and inner divertor detachment. The electron density at the inner strike point measured by Langmuir probes is about $\approx 7 \times 10^{19} \text{m}^{-3}$. At such a density and assuming that the main fraction of radiation is due to recombination, the estimated local Te calculated from ADAS photo-emission coefficients [19] is about 1.0eV confirming the statement of a fully detached inner divertor. The electron temperature close to the outer strike point, measured by Langmuir probes again, is about 12eV. The outer divertor is thus completely attached.

Dithering cycles have not been observed in the majority of the H-mode DL pulses on ASDEX Upgrade or, to be exact, only one DL pulse shows the dithering cycles. In contrary to AUG, on JET-ILW the density after H-L transition shows a strong reduction pushing the plasma again into the H-Mode operational space with the consequent improvement in the particle confinement. This leads subsequently to the increase of the density with the following H-L transition. On ASDEX Upgrade, however, the density increases after the H-L transition, driving the plasma away from the H-mode operational space

3.3 Characterisation of the H-mode DL on ASDEX Upgrade

The operation phases of the H-mode DL in AUG are identical to the findings on JET-ILW: 1) a stable H-mode phase, 2) a degrading H-mode phase, 3) breakdown of the H-mode, followed by 4) the L-mode phase. These phases can be characterised by their impact on the plasma stored energy (W_{MHD}) and the edge line-integrated electron density. Fig.6 shows the phases which can also be distinguished by their impact on the pedestal top temperature. The first phase evolves along an isobaric line while, in the second and third phases, the pressure reduces and thus the confinement degrades. The four phases are observed in all discharges dedicated to the H-mode DL studies at full-W AUG, independently of the discharge parameters and fuelling approaches

The characteristics of the phases and their impact on the electron density and temperature profiles (see Fig.6) are listed in the following:

Stable H-mode The stable H-mode is the standard operational H-mode regime: the plasma density increases at a stable confinement. The pressure is constant and the plasma evolves along an isobaric line (see Fig. 6). The increase in electron density takes place in the plasma core and edge and, since the pressure is constant, the electron temperature decreases accordingly. The transition from type-I to type-III ELMs takes place typically, but not exclusively, in this phase.

Degrading H-mode The density in the confined region stays fixed and an electron density shoulder is forming in the SOL. At the same time, the width of the temperature pedestal appears to reduce and, thus, the pedestal top temperature reduces. This leads to a reduction of the stored energy and energy confinement.

Breakdown of the H-mode In this phase the overall density profile is fixed, thus, the line integrated density does not change either. The gradient of the temperature pedestal is eroded during this phase, which resembles a drop in confinement.

L-mode In the last phase, the density increases again over the full profile and the temperature further reduces. The plasma pressure and energy confinement is almost constant again. In this phase the outer divertor goes into complete detachment. At the end of this phase, typically the L-mode density limit is reached and the plasma ends by a disruption.

3.4 Evolution of n_e and T_e profiles during the density ramp

Fig 7 shows edge temperature and density profiles from various diagnostics for a typical Hmode DL discharge in JET-ILW, taken at two times with f_{GW} =0.75 and f_{GW} =0.92 respectively. JET's high resolution Thomson scattering system (HRTS) [20], a key diagnostic, has been used to provide radial electron temperature and density profiles. The solid curve indicates the modified hyperbolic tangent (mtanh) fit to the HRTS profiles. Additionally, the lithium beam [21,22] measured the n_e profiles in the plasma edge and radial T_i profiles were obtained with the charge-exchange recombination spectroscopy (CXRS) diagnostic [23].

In the fully metallic JET-ILW machine, the n_e profile is flat even at lower Greenwald fraction. Practically, n_{core} has the same values as n_{ped} during the entire phase of density rise. During the density ramp, the n_e profile stays flat until H-L transition. The T_e profile shows a strong reduction during the density rise and reaches the pedestal value of about 200eV shortly before H-L transition. As show in [13] the metallic machine has a much denser and cooler pedestal than the C-machine. The strong thermal coupling between ions and electrons as T_e \approx T_i in the pedestal has been observed prior to the H-L transition. No clear sign of decoupling between electrons and ions is observed even at the relative lowest density with f_{GW} =0.75.

As shown on AUG [11] at medium to high densities, a much higher divertor pressure is needed to achieve the same increase of plasma density. When the fuelling limit is finally reached, the plasma density does not increase despite an increase of the neutral gas pressure in the divertor (see Fig.8). The fuelling limit is due to an outward shift of the ionization profile. Thus, the fuelling efficiency by gas puff is reduced at high densities: only a small fraction of the fuelled gas reaches the confined region.

Additionally, Fig.8 shows time traces of the line-integrated core density, radiated power and neutral gas pressures in the main chamber and in the divertor. No clear sign of fuelling limit in JET-ILW has been observed even at densities close to the DL. Shortly before the H-L

transition in the late dithers, n_e starts to reduce, as mentioned before, due to extended Lphases of the dithers where the short H-mode periods are not able to provide a full recovery of the density.

In order to clarify the impact of the radial electric field (E_r) on the H-mode DL, the measurements of E_r during the breakdown phase of the H-mode in AUG have been performed [11]. At the onset of this phase, the E_r is significantly below the threshold for the L- to H-mode transition (-15 kV m⁻¹). Only at the end of this phase, the E_r well is close to the threshold. Therefore, E_r is not related to the onset of the H-mode DL, but might play a significant role in the final transition to L-mode.

4. Role of Detachment in H-mode density limit

The H-mode density limits in earlier experiments on JET-C demonstrate a good agreement between experiment and the model developed by Borrass et al. [24]. According to this model, the onset of the H-mode density limit is related to the plasma detachment at the divertor plates between ELMs. The H-mode density limit in the machine with the ILW shows larger values (>20%) than predicted by Borrass, indicating in this latter case that the H-L transition cannot be explained by the detachment.

Fig. 8 shows the observations made in the divertor of JET-ILW during the approach to the limit in the H-mode density limit discharge. The time traces show measurements of the pedestal density n_{ped} and pedestal temperature T_{ped} . As well as the integrated ion saturation current to the outer divertor and the local saturation current at the outer strike point. The lower envelope of the saturation currents indicates the roll-over into detachment during the inter-ELM period in the outer divertor at time t=14s. After t=14s the outer divertor is at least partially detached. At 15s the D γ -emission rapidly increases in the outer divertor. At the same

time, the D_{γ}/D_{α} -ratio increases strongly up to the level of ≈ 0.1 throughout the outer divertor plasma, indicating a strong volume recombination. Additionally, the ion flux to the outer divertor reduces and reaches at t=15s the degrees of detachment $DoD_{peak}\approx 5.0$ and $DoD_{int}\approx 3.0$. Thus, after t=15s the outer divertor is fully detached. Despite the fully detached inner and outer divertor the density in the core and at the edge is raised for a long-time period after the outer divertor is fully detached, until the H-L transition. Thus, detachment and subsequent MARFE if any do not trigger the H-L transition. This experimental evidence supports the view of the earlier observation on JT-60U with [7] that it is the plasma confinement which is ultimately responsible for the H-mode density limit.

A similar conclusion delivers the observation at ASDEX Upgrade [11,12]. In full-W AUG, the complete detachment sets in after the H-mode DL and, thus, the detachment does not play the key role in the physics of the H-L transition. Also, with N-seeding, fully (inter-ELM) detached H-mode plasmas could be observed.

5. Impact of the input heat power on the Density Limit

The impact of the input heat power on the H-mode density limit at JET has been analysed in the experiments by varying the neutral beam auxiliary heating NBI-power from 8 to 20MW in low -triangularity magnetic equilibria: $B_T \approx 2.7T$, $I_p = 2.5MA$, $q_{95} = 3.36$, average $\delta = 0.22$, location of the inner and outer strike points on the vertical targets. Fig.10a shows the measured Greenwald fractions as a function of the total heating power obtained in these experiments. Note, that the H-L transition in the pulse with $P_{NBI} = 20MW$ has not been achieved. Because the density increase during the dithering phase is very marginal, we used here the maximum density reached during the dithering cycles. Basically, the density limit in H mode on JET-ILW is nearly independent of the power at higher heating power beyond 8MW and the corresponding densities only approach in this configuration a Greenwald fraction of about $f_{GW}=0.9$. At ASDEX Upgrade, however, the H-mode density limit shows an increase with heating power [11]. Fig.10b represents the result of the H-mode DL experiment which was performed by varying the NBI heating power from 5MW to 12.5MW (2-5 NBI sources) at constant plasma current and safety factor for the full-W AUG. The achieved density increases with the heating power.

The possible explanation of the different dependence on the heating power could be that the fuelling efficiency by gas puff is reduced at high densities as show in section 3.4: only a small fraction of the fuelled gas reached the confined region. In comparison to the gas puff, the fuelling rate by the AUG NBIs (about 10^{21} D/s versus 10^{22} D/s by gas puffing) is relatively large and it is not negligible because the major part of the injected D atoms are delivered directly into the confined region. This may explain the increase of the f_{GW} with the increase of the NBI heating power on AUG. On the JET machine, the puff rate ($\approx 10^{23}$ D/s) is of two orders of magnitude larger than the rate of the injected neutral D-atoms ($\approx 10^{21}$ D/s) and thus the fuelling by NBI is negligible.

6. Operational space of the H-mode

Figure 11 shows the operational space of the H-mode in a way similar to what was presented by V. Mertens in **[25].** The evolution of the

 $P_{sep} = P_{\Omega} + P_{NBI} - \frac{dW_{dia}}{dt} - P_{rad}^{bulk} = P_{L-H} - P_{rad}^{bulk}$, during the H-mode DL discharge has been plotted against the f_{GW}. The power flux across the separatrix into the scrape-off layer, P_{sep}, is selected since it is physically more decisive than the total heating power.

The H-mode discharge (red curve) reaches the density of the H-mode DL ($f_{GW}\approx 0.94$ in this case) and then turns into L-mode (blue curve). Typically on JET-ILW, the density after H-L transition shows a strong reduction which prevents the immediate formation of a MARFE and allows the soft landing of the discharges.

The H-mode DL has also to be distinguished from the H- to L-mode back transition that occurs due to a reduction of the heating power instead of an increase of the electron density (downward movement in Fig. 11 instead of a movement to the right). If the heating power is below the L-H threshold, a back transition takes place. The black dashed line in Fig. 11 corresponds to the ITPA scaling law $P_{thr,08} \sim \overline{n_e}^{0.717} B_T^{0.803} S^{0.94}$ [26], where n_e denotes the line-averaged electron density, B_T the toroidal magnetic field at the geometric plasma centre and S the separatrix surface area after subtraction of the bulk radiation, P_{rad}^{bulk}. Additionally, the graph contains the (n_e, P_{sep}) pairs for the L-H transition for the pulses with the same magnetic field configuration (vertical target configuration) and the main plasma parameters (I_p/B_T=2.0MA/2.4T) [27,28]. Several pairs have been included for the H-L transitions too. Note that on JET the L-H hysteresis has not been observed, or at least it is very weak.

At high densities, the L-H threshold power diverges from the linear scaling. According to these observations, it is not possible to access the H-mode out of an L-mode with densities close to the Greenwald limit.

7. Impact of the safety factor on the Density Limit

A large variation of the safety factor has been attempted to study the impact of the q_{cyl} on the H-mode DL. At a constant plasma current, the q_{cyl} variation is realised by changing the toroidal magnetic field. Fig.13 shows the Greenwald fraction at the H-mode DL versus q_{cyl} $(q_{cyl} = \frac{2\pi a\epsilon B_T}{\mu_0 I_p} \frac{(1+\kappa^2)}{2})$, where ϵ is inverse aspect ratio a/R and κ is the plasma elongation) at almost constant heating power (P_{NBI} =7.8÷8.1 MW) and plasma current (I_p = 0.8MA) for full-W AUG (right-hand side of figure) and JET-ILW (P_{NBI} =12÷13 MW) and plasma current (I_p = 1.75÷2.0MA) (left-hand side of figure). The fitted curve indicates the $q_{cyl}^{-0.51}$ dependence of the maximum reached Greenwald fraction for full-W AUG and JET-ILW. Basically, both machines show a very similar trend: an increase of f_{GW} with the decrease of q_{cyl} . The maximum achieved Greenwald fraction in JET-ILW is about $f_{GW}\approx 1.03$ at $q_{cyl}=2.45$ and maximum of $f_{GW}\approx 1.0$ at $q_{cyl}=2.8$ in AUG.

8. Impact of the plasma shape on the Density Limit at fixed plasma triangularity

Fig. 13 shows time traces of n_e and the BeII emission for a H-mode DL gas ramp discharges in JET-ILW with different plasma shapes at $B_T/I_p=2.37T/2.0MA$, $q_{95}=3.6$. The plasma triangularity was low and varied from 2.7 to 3.2. The pulse with inner and outer strike points located in the respective divertor corners exhibits a strong reduction ($f_{GW}=0.78$ versus 0.92 for another shown plasma shape discharges) of the H-mode DL. In the corner configuration with the strike points close to the cryopump the pumping efficiency of the recycled particles is increased impacting the SOL profiles. Reduction of the f_{GW} supports the idea that the density limit may reside in the SOL physics. The ITER magnetic configuration has the best configuration with strike points on the vertical targets according to this analysis.

9. Impact of the plasma triangularity on the Density Limit

As reported in [13] the investigated density limit on JET is up to 15% higher in the high- δ (B_T \approx 3.0T, I_p=2.0MA, q₉₅=4.6, averaged δ =0.42, the location of the inner and outer strike points on the vertical target and horizontal target correspondingly) divertor geometry than in the pulses with strike points on the vertical targets at low- δ (B_T \approx 2.7T, I_p=2.5MA, q₉₅=3.36, averaged δ =0.22, the location of the inner and outer strike points on the vertical targets). Recently it has been also reported in [29] that the power threshold (P_{thr}) for the L-H transition is very sensitive to variations in main plasma shape.

However, the experiments on AUG show that variation of the triangularity does not impact the density of the breakdown of the H-mode [11]. On the other hand, it has been reported that the onset of the degrading H-mode phase is at a higher density for the higher triangularity, i.e. the stable H-mode phase extends to higher densities. It should be mentioned here that the statistic of the H-mode DL pulses is very poor for both tokamaks, JET and AUG, and further investigations of the impact of triangularity on the H-mode DL are required.

10. Comparison with the theoretical models

10.1 Implication of the heuristic drift SOL model for the density limit

In the paper [30] the author, R.J.Goldston, suggests that the H-Mode and, more generally, the Greenwald density limit may be caused by an MHD instability in the SOL close to the separatrix, rather than originating in the core plasma or pedestal. This idea has been triggered by observations showing that the ballooning $\alpha = -Rq^2\beta'$ parameter, derived from the heat flux width, almost linearly increases with f_{GW} until detachment occurs. The ballooning α parameter was derived [30] under the assumption that the pressure gradient scale length at the separatrix is approximately equal to the experimentally measured λ_q ($\alpha = -Rq^2\beta/\lambda_q$). Assuming that the SOL β limit is defined by criticality to MHD instability, characterized as $\alpha_{crit} \sim C_{\alpha}(1 + \kappa^2)^{\gamma}$, the Goldston model gives

$$f_{GW,Goldston} = 8.13 \cdot C_{\alpha} \frac{\bar{n}}{n_{sep}} \left(\frac{q_{cyl}RB}{a} P_{SOL}\right)^{-1/8} (1+\kappa^2)^{\gamma-3/2} \left[\frac{2\bar{A}}{(1+\bar{Z})}\right]^{9/16} \left(\frac{Z_{eff}+4}{5}\right)^{-1/8}$$

where q_{cyl} is the cylindrical approximation for the safety factor, κ is plasma elongation, *a* and *R* the horizontal minor and major radiuses, P_{SOL} is the power which crosses from the core region into the SOL, \bar{n} and n_{sep} are the separatrix and the line-averaged densities. Generally speaking, f_{GW} shows little variation with key parameters. On the contrary, it shows a relatively strong dependence on the average atomic mass, \bar{A} , of the plasma species.

For elliptic plasmas with elongation κ it could be adopted according to Ref. [31] $\alpha_{crit} \approx 0.4s(1 + \kappa^2)$, where $s = d \ln q/d \ln r$ is the magnetic shear (typically s=2).

Experimental measurements of the H-mode density limit expressed in terms of the Greenwald fraction, f_{GW} , in both tokamaks, JET-ILW and AUG, are plotted against the f_{GW} derived from the Goldston prediction (see Fig14). The experimental results contain only data sets of the pulses which correspond to plasma configurations with strike points on the vertical targets. Surprisingly the Goldston model gives a good agreement with recent measurements concerning the absolute value of f_{GW} as well as the dependence on main plasma parameters. It should be noted that the predicted f_{GW} gives account of the very weak P_{SOL} scaling observed in experiment.

10.2 Critical beta and collisionality dependence model

In the paper **[16]** the authors (A. Chankin and G. Saibene) proposed a model based on the assumption that the behaviour of high-density ELMy H-modes can be explained through the similarity of edge transport mechanisms. Similar to the Goldston prediction it is assumed that the density at the "edge" is controlled by ideal ballooning limit for pressure gradient:

$$\nabla\beta \sim \frac{f(s)}{q^2R}$$

Additionally it is assumed that H-L transition is caused by an increased collisionality:

$$v_e^* \sim \frac{Z_{eff} n_e q R}{T_e^2}$$

Fixing these two parameters gives:

$$n_{e,crit} \sim \frac{B^{\frac{4}{3}}}{q^{5/3}R} \lambda_p^{2/3} f(shear)^{2/3} Z_{eff}^{-1/3}$$

The electron heat balance equation, which includes the parallel heat conduction to the target, gives the following expression for $\lambda_{T_e} q_R \sqrt{Z_{eff} n_e \chi_e} / T_e^{5/4}$, which was used as the scaling for λ_p . To get the expression for the f_{GW} fraction, scaling for the cross-field thermal diffusivity χ_{\perp} was to be derived using a simple two-point representation of the tokamak scrape-off layer (SOL) in the conduction limited regime, based on the parallel and

perpendicular energy balance equations in combination with the heat flux width [32] predicted by a heuristic drift based model [33].

Finally, using this expression for χ_e , we obtain

$$f_{GW,Chankin} = \propto \frac{\bar{n}}{n_{sep}} \frac{P_{SOL}^{\frac{7}{34}} q_{cyl}^{\frac{7}{34}} f(s)^{8/17}}{\kappa (1+\kappa^2)^{21/17} B^{11/34}} \left(\frac{R}{a}\right)^{7/34} \left[\frac{2\bar{A}}{(1+\bar{Z})}\right]^{9/68} \left(\frac{Z_{eff} + 2.58}{3.58}\right)^{-39/238}$$

Similar to the Goldston model, the critical beta and collisionality dependence model (Chankin model) predicts for f_{GW} the very weak scaling with respect to the main plasma parameters observed in experiment. The Greenwald fraction, f_{GW} , experimentally achieved in H-mode DL experiment on both tokamaks, JET-ILW and AUG, plotted against the f_{GW} derived from Chankin model is shown in Fig. 15. Because the model gives only the dependence of f_{GW} on the plasma parameters and not the absolute value, the factor of proportionality, which should be same for JET and AUG results, has been found as a fitting parameter. The comparison shows a satisfactory agreement of the Chankin model with the experimental results.

Both models, Goldston as well as Chankin, show that the H-mode density limit may be caused by a MHD ballooning drive in the SOL. Also, the increased collisionality may play an essential role. Chankin's model predicts a much weaker dependence of f_{GW} on the average atomic mass, \bar{A} , of the plasma species. Future investigation of the impact of the isotopic mass effect on the H-mode density limit is required.

Conclusions

High-density, non-seeded pure D-discharges on JET with ITER-like Wall (ILW) as well as on AUG have been analysed with the aim of establishing a mechanism for the H-mode density limit in machines with fully metallic walls. The experimental results of the H-mode DL experiments at JET and ASDEX Upgrade (AUG), have been compared and summarised as follows: **Confinement performance**: A similar behaviour of the H-mode DL gas fuelled discharges for both machines has been observed: the confinement deteriorates strongly down to $H_{98Y}\approx 0.55$.

Operation phases: Operation phases are similar for both tokamaks: the stable H-mode phase, degrading H-mode, breakdown of the H-mode with energy confinement deterioration accompanied by a dithering cycling phase, followed by the L-mode phase.

Radiation behaviour: Total radiated power as well as the radiation power in the main chamber (P_{rad}^{bulk}) stays almost constant during the H-mode phase until the H-L transition. The density limit is not related to an inward collapse of the hot discharge core induced by overcooling of the plasma periphery by radiation.

Maximal reached density: The observed H-mode density limit on JET and AUG is found close to the Greenwald limit ($n/n_{GW}=0.8-1.1$).

Impact of the input heat power on the Density Limit:

JET: DL is independent of power at higher P_{heat} . On the JET machine, the puff rate $(\approx 10^{23} \text{D/s})$ is of two orders of magnitude larger than the rate of the injected neutral D-atoms ($\approx 10^{21} \text{ D/s}$) and thus the fuelling by NBI is negligible;

ASDEX Upgrade: DL increases with heating power. The possible explanation could be that the fuelling efficiency by gas puff is reduced at high densities: the only small fraction of the fuelled gas reached the confined region. In contrary to the gas puff, the fuelling fraction by the NBI (about 10^{21} D/s versus 10^{22} D/s by gas puffing) is significant and is about 10%. This fraction is not negligible because the major part of the injected D atoms is delivered directly into the confined region.

Role of Detachment in H-mode density limit: Detachment, as well as the X-point MARFE itself, does not trigger the H-L transition.

Dependence on the safety factor: Both machines show very similar trend: increase of the f_{GW} with decrease of q_{cyl} .

Dependence on the plasma shape:

JET: DL shows strong reduction of the f_{GW} in the corner configuration supporting the idea that the density limit may reside in the SOL physics;

ASDEX Upgrade: Impact of the plasma shape has not been studied

Dependence on the triangularity:

JET: Triangularity has an impact on the DL;

ASDEX Upgrade: DL is independent of triangularity. Further investigations of the influence of the plasma triangularity are required.

Comparison with the theoretical models: Goldston as well as Chankin models give good agreement with recent measurements on both machines with pure D-fuelling, supporting the view that the H-mode density limit may be caused by an MHD ballooning drive in the SOL. Additional studies for the investigation of the influence of the isotopic mass as well as of the impurity seeding (Z_{eff}) on the H-mode DL are required.

Acknowledgement

This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014-2018 under grant agreement No 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

References

- [1] Progress in the ITER Physics Basis, Edd., Nucl. Fusion 47 (2007) S1 sqq.
- [2] H. Zohm, et al.Nucl. Fusion 53 (2013), 073019
- [3] M. Greenwald et al., Plasma Phys. Control. Fusion 44 (2002) R27.

[4] M. Greenwald, J.Terry, S.Wolfe, S.Ejima, M.Bell, S.Kaye and G. Neilson, Nucl. Fusion 28 (1988) 2199

[5] ITER Physics Expert Group on Confinement, Transport, ITER Physics Expert Group on

Confinement Modelling, Database and ITER Physics Basis Editors 1999 Chapter 2:

[6] H.Zohm et al., Phys. Rev. Lett. 72 (1994) 222


[7] A.V. Chankin et al., Plasma Phys. Control. Fusion 44 (2002) A399.

- [8] K. Borrass, J. Lingertat and R. Schneider, Contrib. Plasma Phys. 38 (1998) 130-5
- [9] K. Borrass, R. Schneider and R. Farengo, Nucl. Fusion 37 (1997) 523
- [10] S.Brezinsek et al., J. Nucl. Mater. 438 (2013) S303-S308
- [11] M Bernert et al., Plasma Phys. Control. Fusion 57 (2015) 014038 (12pp)
- [12] M. Bernert, PhD thesis, TU München (2013).
- [13] A. Huber et al., J. Nucl. Mater. 438 (2013) S139–S147
- [14] de la Luna E. et al 2004 Rev. Sci. Instrum. 75 3831
- [15] M.Z.Tokar, Physics of Plasmas 16, 020704 (2009)
- [16] A. V. Chankin and G Saibene, Plasma Phys. Control. Fusion 41 (1999) 913–930.
- [17] A. Meigs et al., J. Nucl. Mater. 438 (2013) S607–S611
- [18] B.A. Lomanowski et al., Nucl. Fusion 55 (2015) 123028 (14pp)
- [19] H.P.Summers et al., Atomic Data and Analysis Structure, URL: http://www.adas.ac.uk/
- [20] R. Pasqualotto et al., Rev. Sci. Instrum. 75 (2004) 3891
- [21] M. Brix et al 2010 Rev. Sci. Instrum. 81 10D733
- [22] M. Brix et al 2012 Rev. Sci. Instrum. 83, 10D533
- [23] T.M. Biewer et al., Expanded Capability of the Edge Charge-Exchange Recombination

Spectroscopy System on JET, Proceedings of the 35th EPS conference, Greece (2008)

- [24] K. Borrass et al., Nucl. Fusion 44 (2004) 752.
- [25] V. Mertens et al., Nucl. Fusion, Vol. 37, No. 11 (1997)
- [26] Martin Y. et al 2008 J. Phys.: Conf. Ser. 123 012033
- [27] E. Delabie et al., The relation between divertor conditions and the L-H threshold on
- JETproceeding of the 24th IAEA conference, St. Petersburg (2014)]
- [28] E. Delabie et al., The relation between divertor conditions and the L-H threshold on JET
- Proceedings of the 42st EPS conference, Lisbon (2015)
- [29] C.F. Maggi et al., Nucl. Fusion 54 (2014) 023007 (15pp)
- [30] R. J. Goldston et al, Journal of Nuclear Materials 463 (2015) 397-400
- [31] G. Bateman et. al, Phys. Plasmas, Vol. 10, No. 11, November 2003

[32] A. Huber and A. V. Chankin, Scaling for the SOL/separatrix χ_{\perp} following from Goldston's power scrape-off layer width, to be published in Plasma Phys. Control. Fusion [33] R. J. Goldston, Nuclear Fusion 52, 013009(2012).

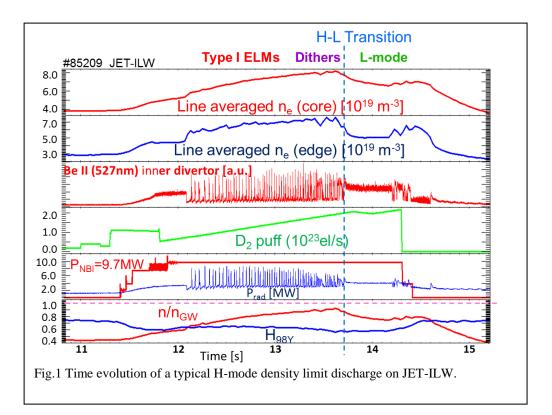

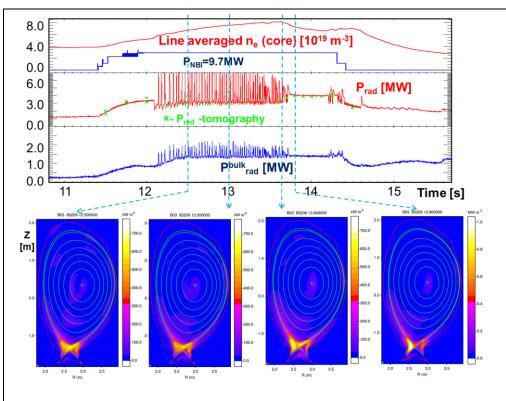
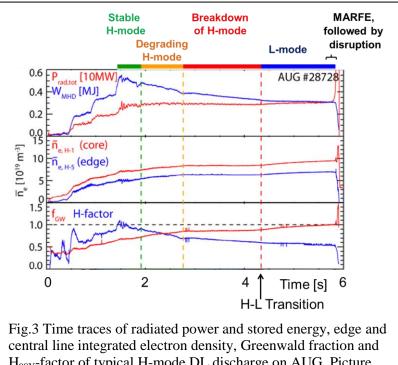


Fig.2 Time traces during a typical during the density ramp experiment on JET-ILW. Also shown are the poloidal radiation distributions during different time phases of the H-mode DL discharge. The total as well as the bulk radiation stays constant throughout the discharge.





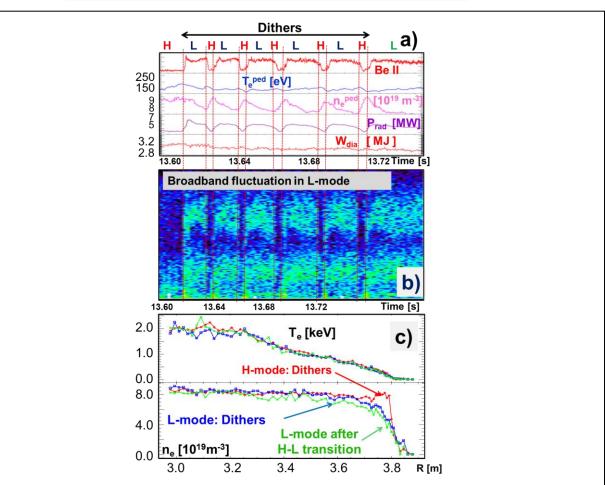
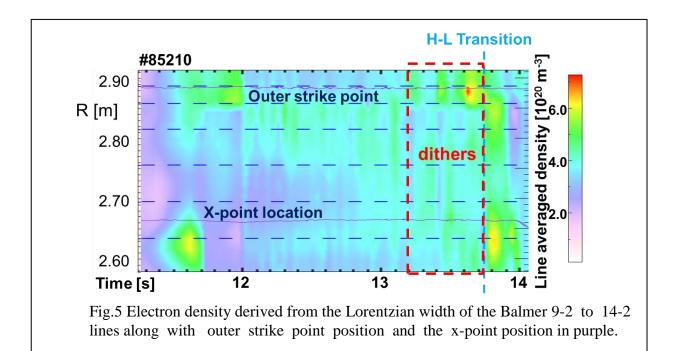


Fig.4 Characteristic time traces of the high density limit JET-ILW discharges for dithering cycles before the H-L transition: BeII-emission signal, pedestal density n_{ped} and temperature T_{ped} , total radiated power P_{rad} , plasma stored energy W_{dia} as well as power spectrum of a magnetic probe located inside the vessel on the high field side. Also shown ne and T_e profiles during the transient H-L-H periods.



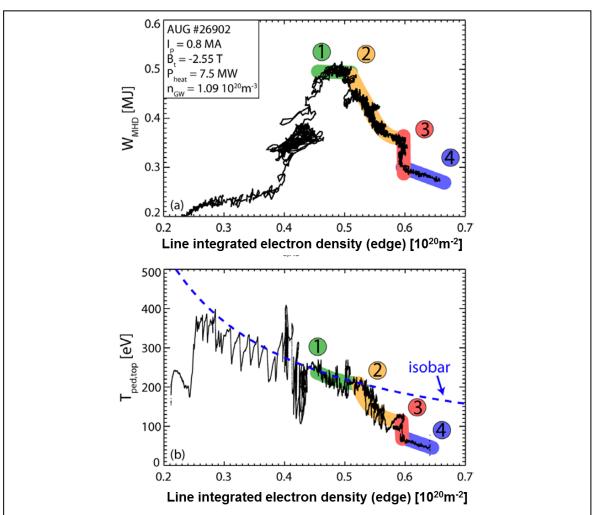


Fig.6 (a) W_{MHD} –n_e plot for H-mode DL discharge in AUG;(b) Estimate of the pedestal top temperature plotted versus the edge density. The four phases can also be distinguished, the first phase evolves along an isobaric line. The strong oscillations are caused by heating steps and ELMs. Picture adapted from [11].

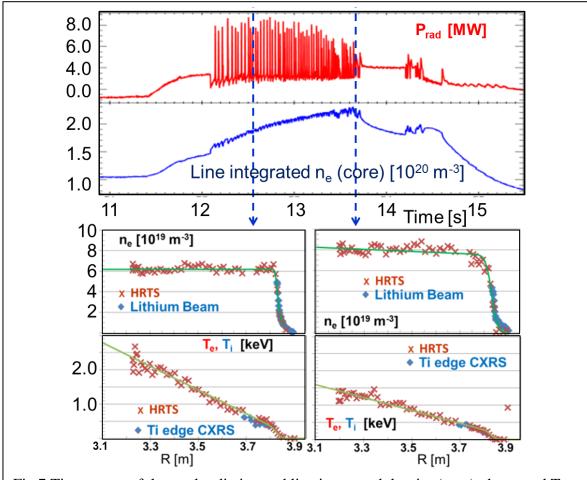


Fig.7 Time traces of the total radiation and line integrated density (core), the n_e and T_e at two time events during the density ramp in JET-ILW, the long-dashed line mtanh fits to these results.

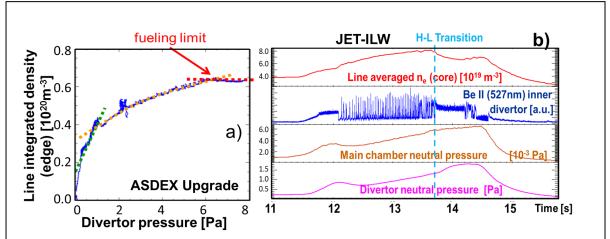


Fig.8 (Left hand side) line integrated edge density plotted versus the neutral gas pressure in the divertor [11]. The plasma density saturates and reaches a fuelling limit (red line); (right hand side) time traces of line integrated core density, radiated power and neutral gas pressures in the main chamber and in the divertor. No clear sign of fuelling limit in JET-ILW during the H-mode DL.

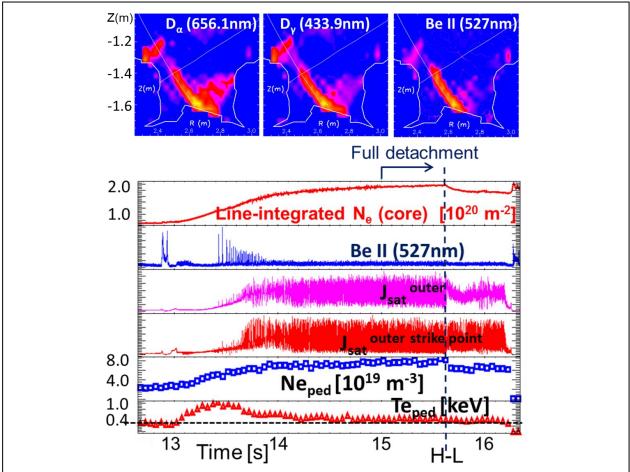
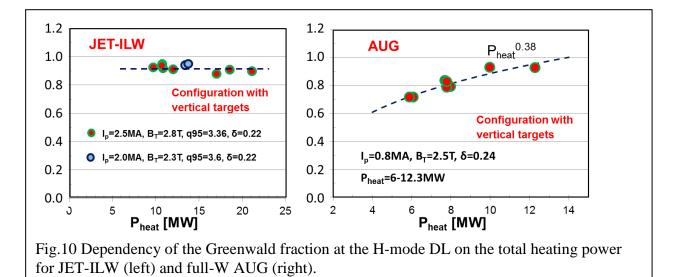


Fig.9 Tomographic reconstructions of D_{α} -, D_{γ} - and BeII-emissions at H-mode DL and the time traces of the selected plasma signals. The dashed vertical line corresponds to the H-L transition.




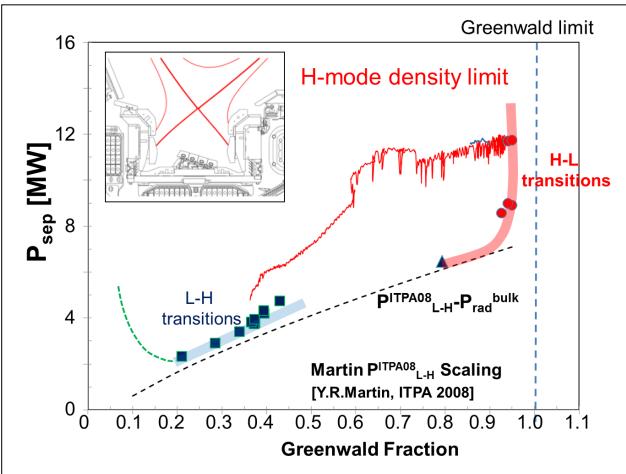


Fig.11 Operational space of the H-mode for high densities discharges in JET-ILW with the vertical target configuration. The H-mode density limit is indicated by the solid red line, the Greenwald limit by the dashed line. The blue line represents the L-H transition and the black dashed line corresponds to the ITPA scaling law [26].

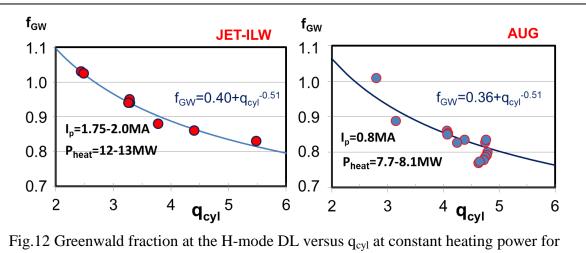

JET-ILW (left) and full-W AUG (right).

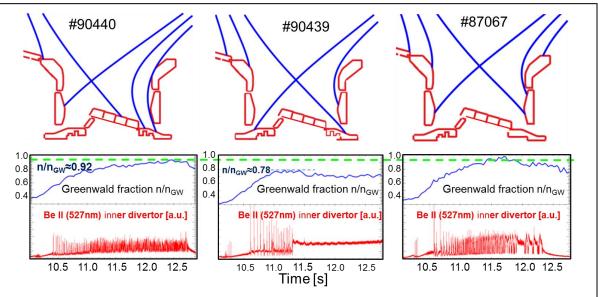


Fig.13 Evolution of the Greenwald fraction for three discharges with different magnetic shapes.

